


IGBT Discrete

V_{CE}	1200	V
I_C	40	A
$V_{CE(SAT)} I_C=40A$	1.85	V
P_D	428	W

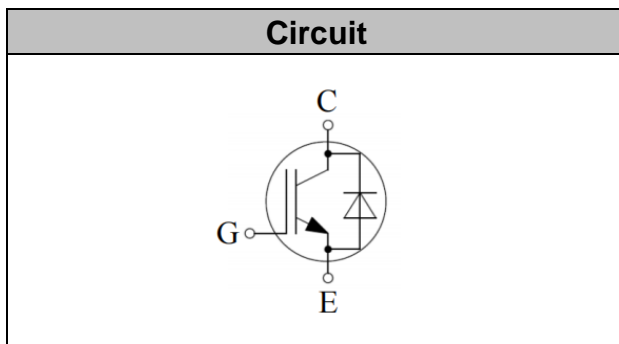

Applications

- General Inverter for Automotive and Industrial Use
- AC and DC servo drive amplifier
- Uninterruptible power supply

Features

- Low Collector - Emitter Saturation Voltage
- Maximum junction temperature 175°C
- Qualified to AEC-Q101
- Including fast & soft recovery anti-parallel FWD
- High short circuit capability(10us)
- RoHS Compliant

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-Emitter Breakdown Voltage	V_{CE}	1200	V
DC Collector Current, limited by T_{jmax} $T_C=25^\circ C$ $T_C=100^\circ C$	I_C	80 40	A
Diode Forward Current, limited by T_{jmax} $T_C=25^\circ C$ $T_C=100^\circ C$	I_F	80 40	A
Continuous Gate-Emitter Voltage	V_{GE}	± 20	V
Transient Gate-Emitter Voltage ($t_p \leq 10\mu s, D < 0.010$)	V_{GE}	± 30	V
Turn off Safe Operating Area $V_{CE} \leq 1200V$, $T_j \leq 150^\circ C$		160	A
Pulsed Collector Current, $V_{GE}=15V$, t_p limited by T_{jmax}	I_{CM}	160	A
Diode Pulsed Current, t_p limited by T_{jmax}	I_{Fpuls}	160	A
Short Circuit Withstand Time, $V_{GE}=15V, V_{CC}=600V, V_{CEM} \leq 1200V$	T_{sc}	10	μs
Power Dissipation, $T_j=175^\circ C, T_C=25^\circ C$	P_{tot}	428	W



Operating Junction Temperature	T_j	-40...+175	°C
Storage Temperature	T_s	-55...+150	°C
Soldering Temperature, wave soldering 1.6mm (0.063in.) from case for 10s		260	°C

Electrical Characteristics of the IGBT ($T_j = 25^\circ\text{C}$ unless otherwise specified):

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static						
Collector-Emitter Breakdown Voltage	BV_{CES}	$V_{GE}=0V, I_C=250\mu A$	1200		-	V
Gate Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=1.4mA$	4.8	5.6	6.5	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=40A$ $T_j=25^\circ\text{C}$, $T_j=125^\circ\text{C}$ $T_j=150^\circ\text{C}$		1.85 2.20 2.30	2.40	V
Zero Gate Voltage Collector Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V$ $T_j=25^\circ\text{C}$, $T_j=150^\circ\text{C}$			0.25 5.00	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V, V_{GE}=\pm 30V$			200	nA

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic						
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz$	-	2.50	-	nF
Reverse Transfer Capacitance	C_{res}		-	0.09	-	
Gate Charge	Q_G	$V_{CC}=960V, I_C=40A,$ $V_{GE}=15V$	-	0.33	-	uC
Short Circuit Collector Current	I_{SC}	$V_{GE}=15V, t_{sc}\leq 10\mu s,$ $V_{CC}=600V, T_j\leq 150^\circ\text{C}$	-	150	-	A



Electrical Characteristics of the Diode ($T_j = 25^\circ\text{C}$ unless otherwise specified):

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static						
Diode Forward Voltage	V_F	$I_F = 40\text{A}$ $T_j = 25^\circ\text{C}$, $T_j = 125^\circ\text{C}$ $T_j = 150^\circ\text{C}$	1.60	2.00 1.80 1.70	2.60	V

Switching Characteristic, Inductive Load

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic , at $T_j = 25^\circ\text{C}$						
Turn-on Delay Time	$t_{d(on)}$	$V_{CC} = 600\text{V}$, $I_C = 40\text{A}$, $V_{GE} = -15\text{V} \sim 15\text{V}$, $R_g = 12\Omega$	-	45	-	ns
Rise Time	t_r		-	56	-	ns
Turn-on Energy	E_{on}		-	3.8	-	mJ
Turn-off Delay Time	$t_{d(off)}$		-	180	-	ns
Fall Time	t_f		-	80	-	ns
Turn-off Energy	E_{off}		-	1.7	-	mJ
Dynamic , at $T_j = 125^\circ\text{C}$						
Turn-on Delay Time	$t_{d(on)}$	$V_{CC} = 600\text{V}$, $I_C = 40\text{A}$, $V_{GE} = -15\text{V} \sim 15\text{V}$, $R_g = 12\Omega$	-	50	-	ns
Rise Time	t_r		-	58	-	ns
Turn-on Energy	E_{on}		-	5.4	-	mJ
Turn-off Delay Time	$t_{d(off)}$		-	240	-	ns
Fall Time	t_f		-	85	-	ns
Turn-off Energy	E_{off}		-	2.7	-	mJ
Dynamic , at $T_j = 150^\circ\text{C}$						
Turn-on Delay Time	$t_{d(on)}$	$V_{CC} = 600\text{V}$, $I_C = 40\text{A}$, $V_{GE} = -15\text{V} \sim 15\text{V}$, $R_g = 12\Omega$	-	53	-	ns
Rise Time	t_r		-	60	-	ns
Turn-on Energy	E_{on}		-	5.8	-	mJ
Turn-off Delay Time	$t_{d(off)}$		-	260	-	ns
Fall Time	t_f		-	90	-	ns
Turn-off Energy	E_{off}		-	3.0	-	mJ











Electrical Characteristics of the DIODE




Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic , at T_j= 25°C						
Reverse Recovery Current	I _{rr}	I _F =40A, V _R =600V, di/dt= -520A/μs,	-	14	-	A
Diode reverse recovery time	trr		-	439	-	ns
Reverse Recovery Charge	Q _{rr}		-	2.55	-	uC
Reverse Recovery Energy	E _{rec}		-	0.92	-	mJ
Dynamic , at T_j= 125°C						
Reverse Recovery Current	I _{rr}	I _F =40A, V _R =600V di/dt= -520A/μs,	-	18	-	A
Diode reverse recovery time	trr		-	628	-	ns
Reverse Recovery Charge	Q _{rr}		-	6.33	-	uC
Reverse Recovery Energy	E _{rec}		-	2.05	-	mJ
Dynamic , at T_j= 150°C						
Reverse Recovery Current	I _{rr}	I _F =40A, V _R =600V di/dt= -520A/μs,	-	20	-	A
Diode reverse recovery time	trr		-	773	-	ns
Reverse Recovery Charge	Q _{rr}		-	7.05	-	uC
Reverse Recovery Energy	E _{rec}		-	2.25	-	mJ

Thermal Resistance


Parameter	Symbol	Max. Value	Unit
IGBT Thermal Resistance, Junction - Case	R _{th(j-c)}	0.35	K/W
Diode Thermal Resistance, Junction - Case	R _{th(j-c)}	0.65	K/W
Thermal Resistance, Junction - Ambient	R _{th(j-a)}	40	K/W

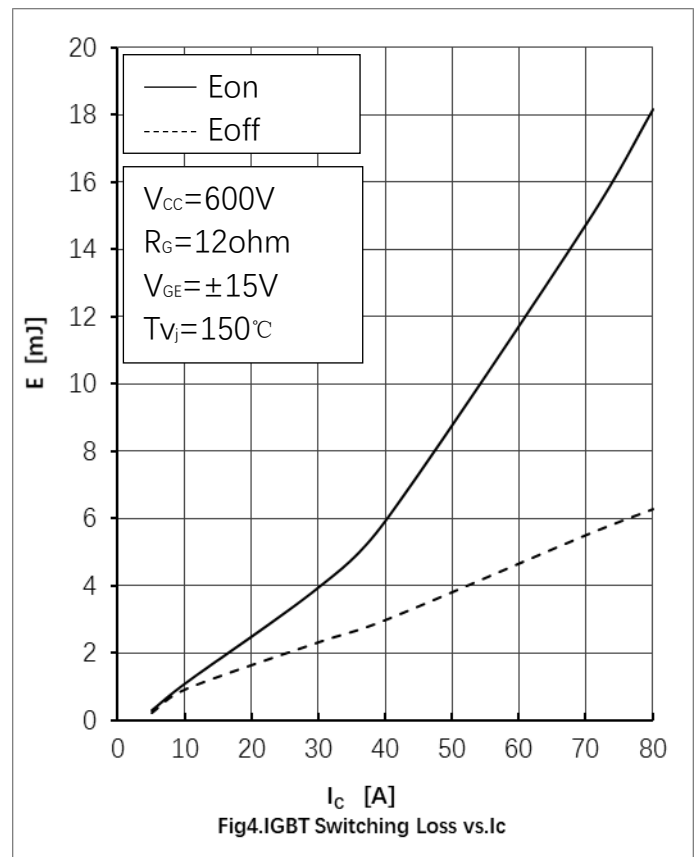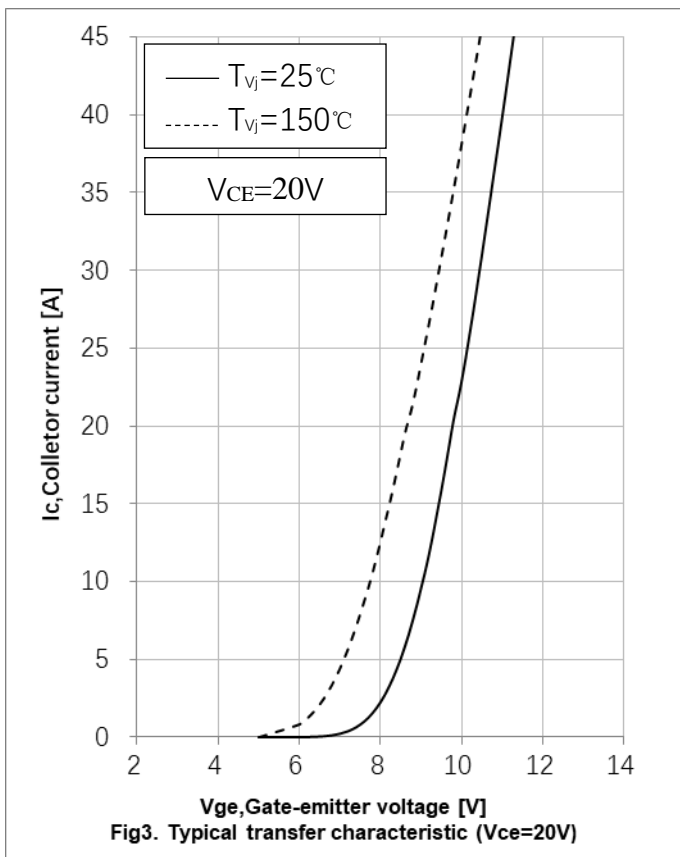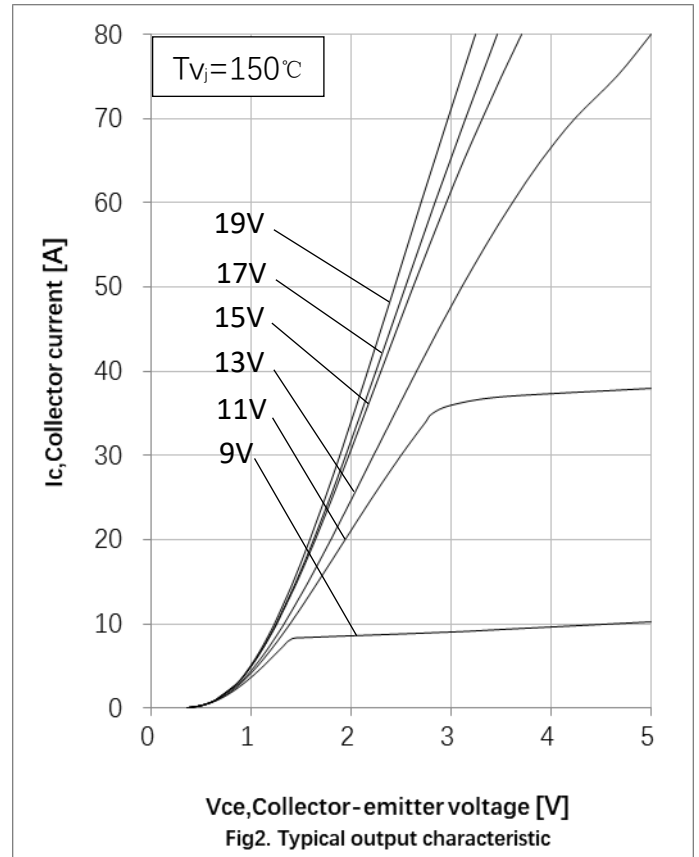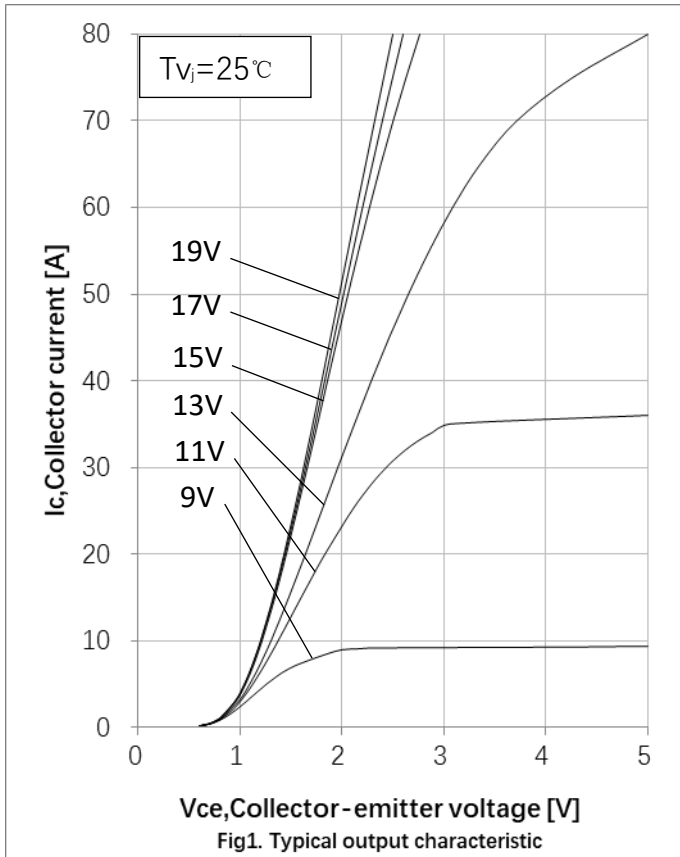

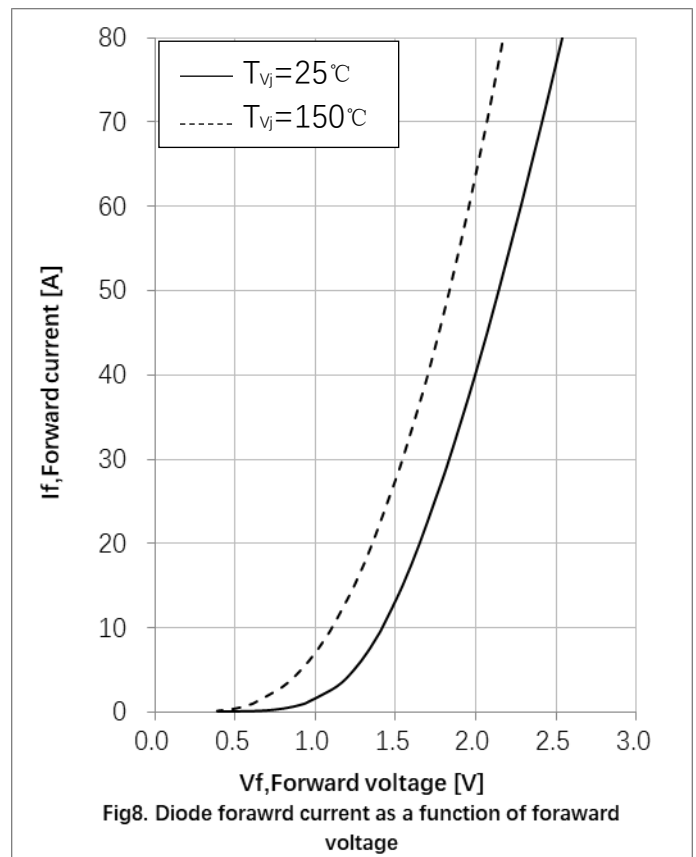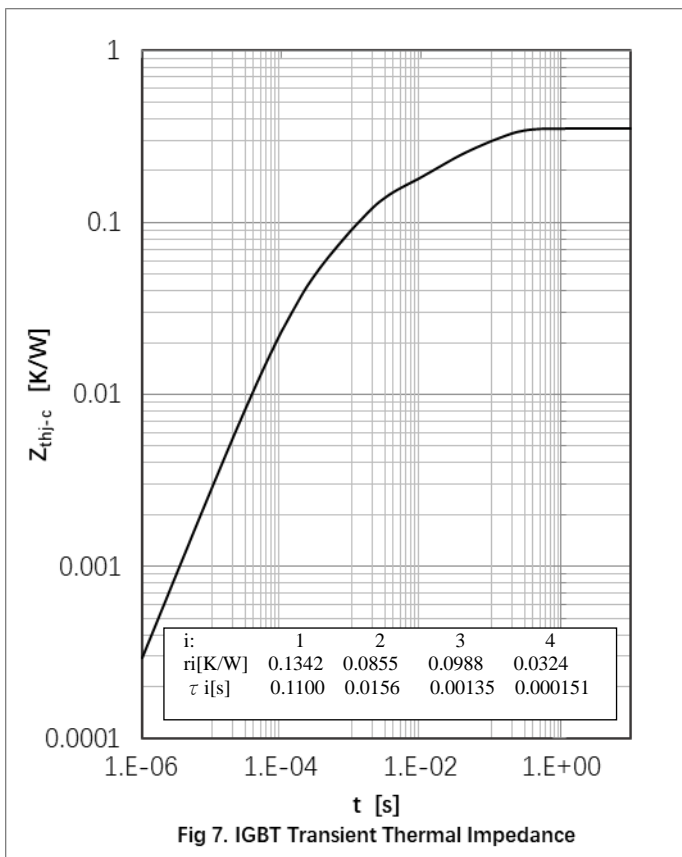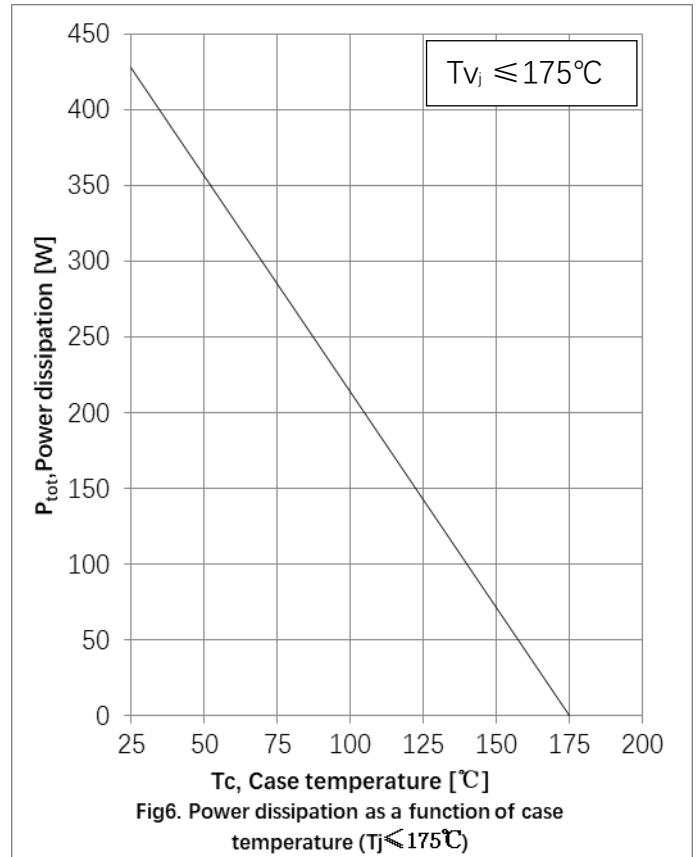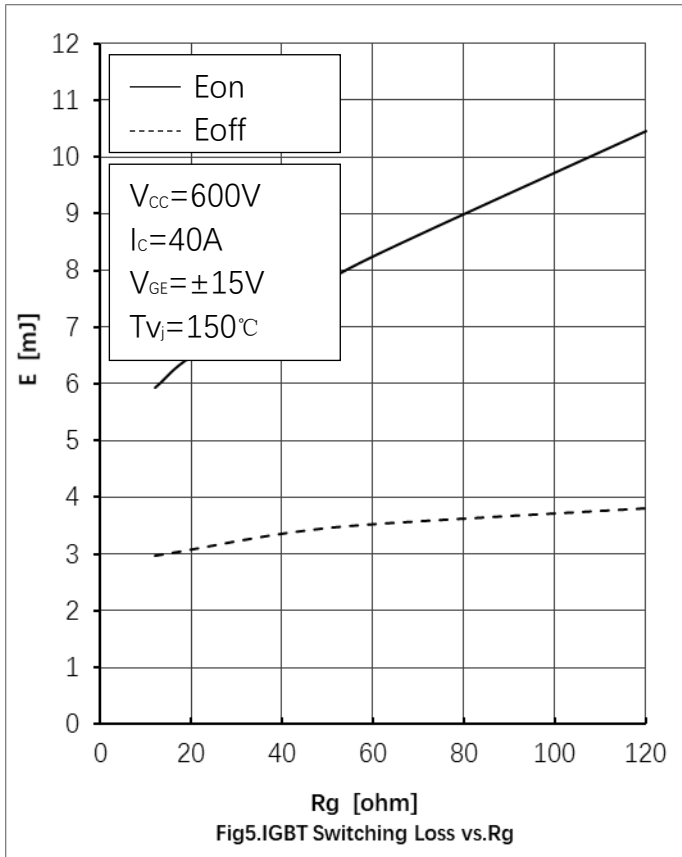

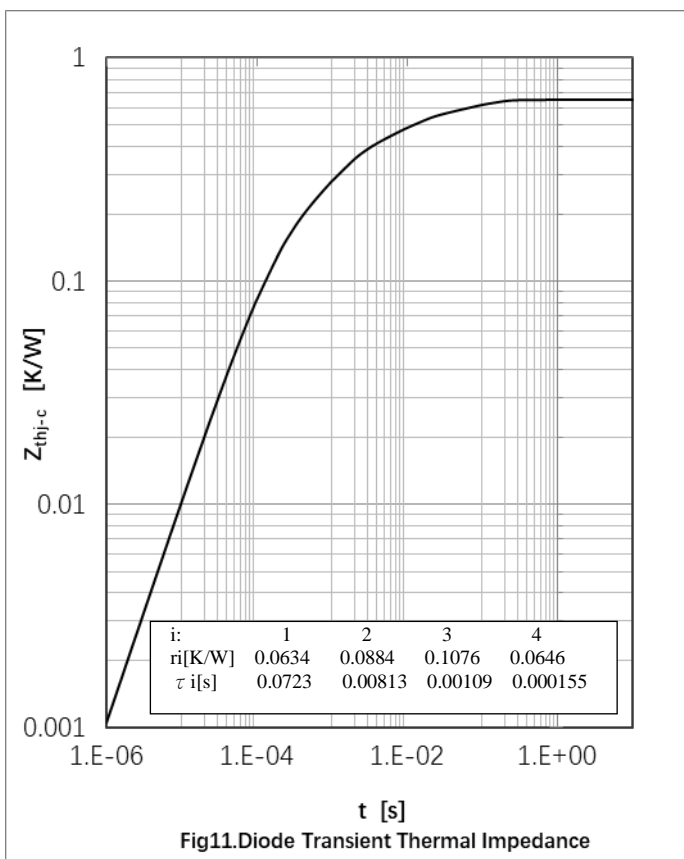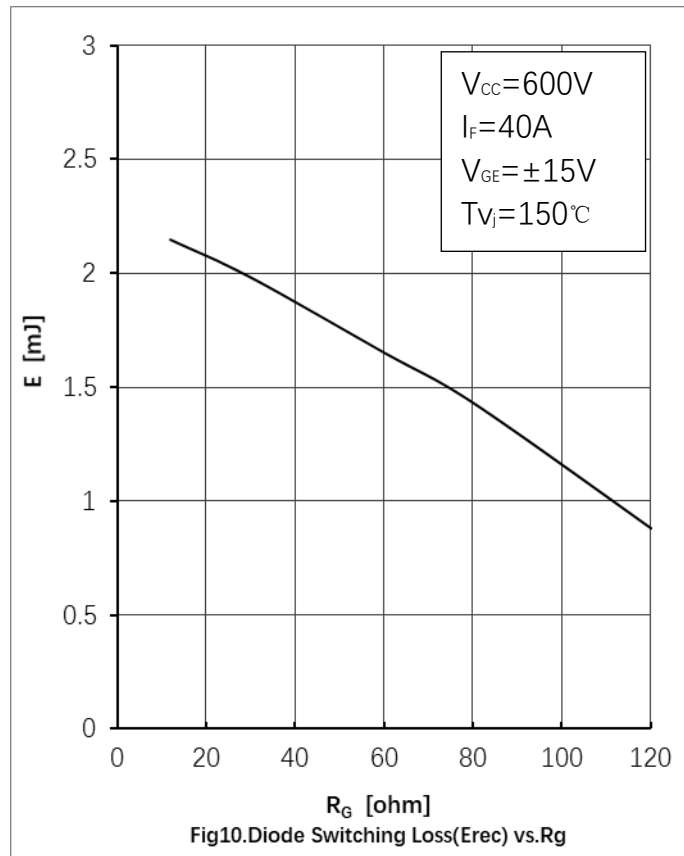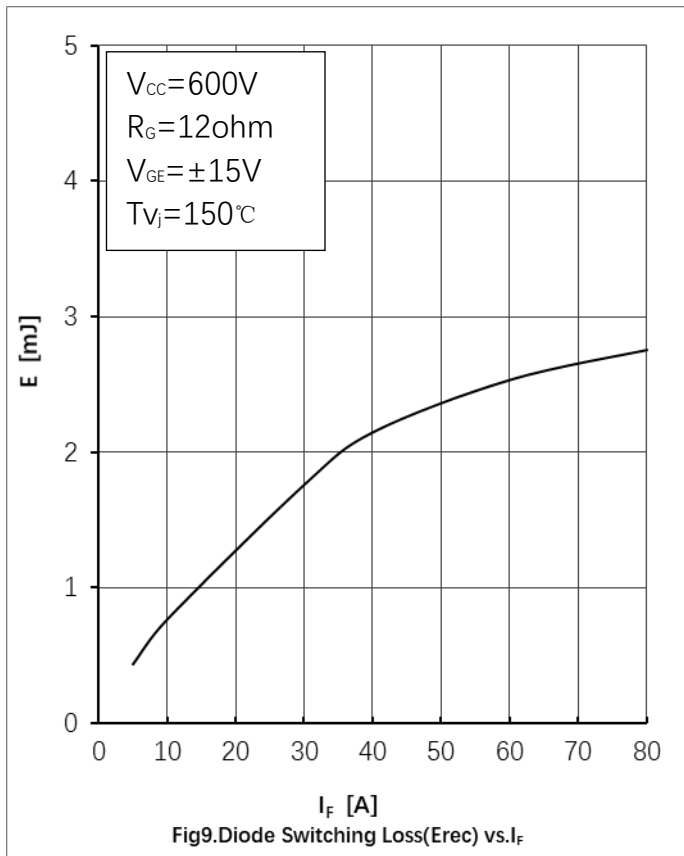


● **Circuit Diagram**



● **Package Outline Information**

CASE: TO 247

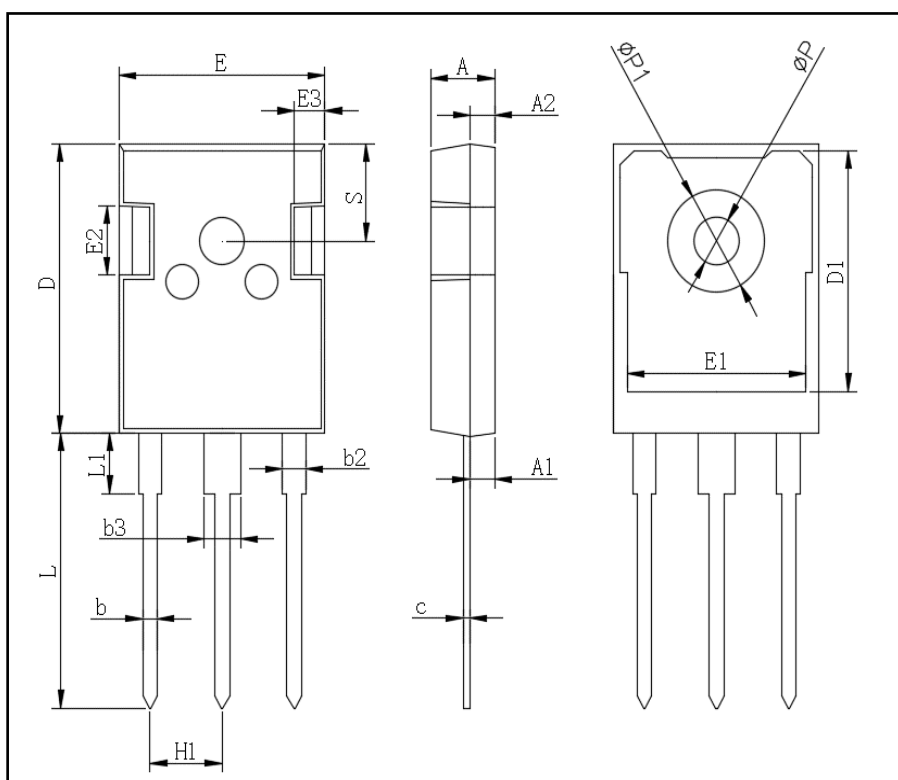

TO-247AB		
Dim	Min	Max
A	4.80	5.20
A1	2.21	2.61
A2	1.85	2.15
b	1.0	1.4
b2	1.91	2.21
C	0.5	0.7
D	20.70	21.30
D1	16.25	16.85
E	15.50	16.10
E1	13.0	13.6
E2	4.80	5.20
E3	2.30	2.70
L	19.62	20.22
L1	-	4.30
ΦP	3.40	3.80
ΦP1	-	7.30
S	6.15TYP	
H1	5.44TYP	
b3	2.80	3.20