

## IGBT Discrete

$V_{CE}$	<b>650</b>	<b>V</b>
$I_C$	<b>75</b>	<b>A</b>
$V_{CE(SAT)} I_C=75A$	<b>1.65</b>	<b>V</b>


## Applications

- Solar converters
- Uninterruptible power supplies
- Welding converters
- Mid to high range switching frequency converters

## Features

- High speed smooth switching device for hard & soft switching
- Maximum junction temperature 175°C
- Positive temperature coefficient
- High ruggedness, temperature stable

### Circuit



## Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-Emitter Breakdown Voltage	$V_{CE}$	650	V
DC Collector Current, limited by $T_{jmax}$ $T_C=25^\circ C$ value limited by bondwire $T_C=100^\circ C$	$I_C$	85 80	A
Diode Forward Current, limited by $T_{jmax}$ $T_C=25^\circ C$ value limited by bondwire $T_C=100^\circ C$	$I_F$	85 80	A
Continuous Gate-Emitter Voltage	$V_{GE}$	$\pm 20$	V
Transient Gate-Emitter Voltage $(t_p \leq 10\mu s, D < 0.010)$	$V_{GE}$	$\pm 30$	V
Turn off Safe Operating Area $V_{CE} \leq 650V$ , $T_j \leq 150^\circ C$		300	A
Pulsed Collector Current, $V_{GE}=15V$ , $t_p$ limited by $T_{jmax}$	$I_{CM}$	300	A
Diode Pulsed Current, $t_p$ limited by $T_{jmax}$	$I_{Fpuls}$	300	A
Power Dissipation, $T_j=175^\circ C$ , $T_C=25^\circ C$	$P_{tot}$	428	W



Operating Junction Temperature	$T_j$	-40...+175	°C
Storage Temperature	$T_s$	-55...+150	°C
Soldering Temperature, wave soldering 1.6mm (0.063in.) from case for 10s		260	°C

**Electrical Characteristics of the IGBT** ( $T_j = 25^\circ\text{C}$  unless otherwise specified):

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Static</b>						
Collector-Emitter Breakdown Voltage	$BV_{CES}$	$V_{GE}=0V, I_C=250\mu A$	650		-	V
Gate Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=0.75mA$	3.2	4.0	4.8	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=75A$ $T_j=25^\circ\text{C}$ , $T_j=125^\circ\text{C}$ $T_j=150^\circ\text{C}$	1.20	1.65 1.95 2.05	2.10	V
Zero Gate Voltage Collector Current	$I_{CES}$	$V_{CE}=650V, V_{GE}=0V$ $T_j=25^\circ\text{C}$ , $T_j=150^\circ\text{C}$			0.25 3.00	mA
Gate-Emitter Leakage Current	$I_{GES}$	$V_{CE}=0V, V_{GE}=\pm 20V$			100	nA

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Dynamic</b>						
Input Capacitance	$C_{ies}$	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz$	-	4.59	-	nF
Reverse Transfer Capacitance	$C_{res}$		-	0.03	-	
Gate Charge	$Q_G$	$V_{CC}=520V, I_C=75A,$ $V_{GE}=15V$	-	0.17	-	uC

**Electrical Characteristics of the Diode** ( $T_j = 25^\circ\text{C}$  unless otherwise specified):

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Static</b>						
Diode Forward Voltage	$V_F$	$I_F = 75\text{A}$ $T_j = 25^\circ\text{C}$ , $T_j = 125^\circ\text{C}$ $T_j = 150^\circ\text{C}$		1.75 1.65 1.60	2.20	V

**Switching Characteristic, Inductive Load**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Dynamic , at <math>T_j = 25^\circ\text{C}</math></b>						
Turn-on Delay Time	$t_{d(\text{on})}$	$V_{CC} = 400\text{V}$ , $I_C = 75\text{A}$ , $V_{GE} = -5\text{V} \sim 15\text{V}$ , $R_g = 10\Omega$ , Inductive Load	-	30	-	ns
Rise Time	$t_r$		-	95	-	ns
Turn-on Energy	$E_{\text{on}}$		-	2.61	-	mJ
Turn-off Delay Time	$t_{d(\text{off})}$		-	142	-	ns
Fall Time	$t_f$		-	41	-	ns
Turn-off Energy	$E_{\text{off}}$		-	0.76	-	mJ
Total switching energy	$E_{\text{ts}}$		-	3.37	-	mJ
<b>Dynamic , at <math>T_j = 125^\circ\text{C}</math></b>						
Turn-on Delay Time	$t_{d(\text{on})}$	$V_{CC} = 400\text{V}$ , $I_C = 75\text{A}$ , $V_{GE} = -5\text{V} \sim 15\text{V}$ , $R_g = 10\Omega$ , Inductive Load	-	27	-	ns
Rise Time	$t_r$		-	88	-	ns
Turn-on Energy	$E_{\text{on}}$		-	2.71	-	mJ
Turn-off Delay Time	$t_{d(\text{off})}$		-	151	-	ns
Fall Time	$t_f$		-	50	-	ns
Turn-off Energy	$E_{\text{off}}$		-	0.88	-	mJ
Total switching energy	$E_{\text{ts}}$		-	3.59	-	mJ
<b>Dynamic , at <math>T_j = 150^\circ\text{C}</math></b>						
Turn-on Delay Time	$t_{d(\text{on})}$	$V_{CC} = 400\text{V}$ , $I_C = 75\text{A}$ , $V_{GE} = -5\text{V} \sim 15\text{V}$ , $R_g = 10\Omega$ , Inductive Load	-	25	-	ns
Rise Time	$t_r$		-	84	-	ns
Turn-on Energy	$E_{\text{on}}$		-	2.78	-	mJ
Turn-off Delay Time	$t_{d(\text{off})}$		-	159	-	ns
Fall Time	$t_f$		-	55	-	ns
Turn-off Energy	$E_{\text{off}}$		-	0.97	-	mJ
Total switching energy	$E_{\text{ts}}$		-	3.75	-	mJ











## Electrical Characteristics of the DIODE





Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Dynamic , at T<sub>j</sub>= 25°C</b>						
Reverse Recovery Current	I <sub>rr</sub>	I <sub>F</sub> =75A, V <sub>R</sub> =400V -di/dt=440A/μs,	-	10	-	A
Reverse Recovery Charge	Q <sub>rr</sub>		-	0.98	-	uC
Diode reverse recovery time	t <sub>rr</sub>		-	160	-	ns
Reverse Recovery Energy	E <sub>rec</sub>		-	0.14	-	mJ
<b>Dynamic , at T<sub>j</sub>= 125°C</b>						
Reverse Recovery Current	I <sub>rr</sub>	I <sub>F</sub> =75A, V <sub>R</sub> =400V -di/dt=440A/μs,	-	17	-	A
Reverse Recovery Charge	Q <sub>rr</sub>		-	2.97	-	uC
Diode reverse recovery time	t <sub>rr</sub>		-	188	-	ns
Reverse Recovery Energy	E <sub>rec</sub>		-	0.47	-	mJ
<b>Dynamic , at T<sub>j</sub>= 150°C</b>						
Reverse Recovery Current	I <sub>rr</sub>	I <sub>F</sub> =75A, V <sub>R</sub> =400V -di/dt=440A/μs,	-	20	-	A
Reverse Recovery Charge	Q <sub>rr</sub>		-	3.26	-	uC
Diode reverse recovery time	t <sub>rr</sub>		-	212	-	ns
Reverse Recovery Energy	E <sub>rec</sub>		-	0.54	-	mJ





## Thermal Resistance

Parameter	Symbol	Max. Value	Unit
IGBT Thermal Resistance, Junction - Case	R <sub>th(j-c)</sub>	0.35	K/W
Diode Thermal Resistance, Junction - Case	R <sub>th(j-c)</sub>	0.45	K/W
Thermal Resistance, Junction - Ambient	R <sub>th(j-a)</sub>	40	K/W

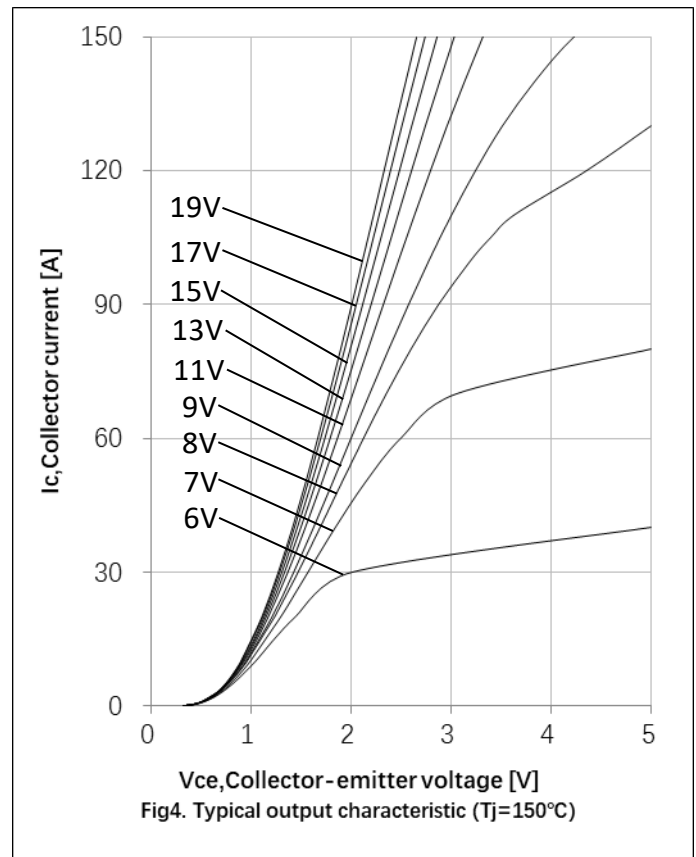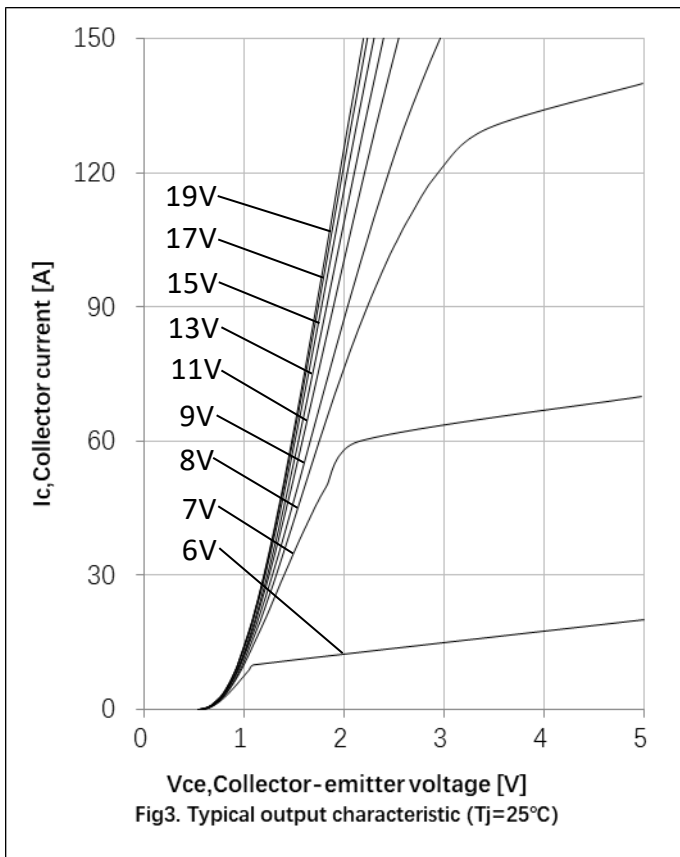
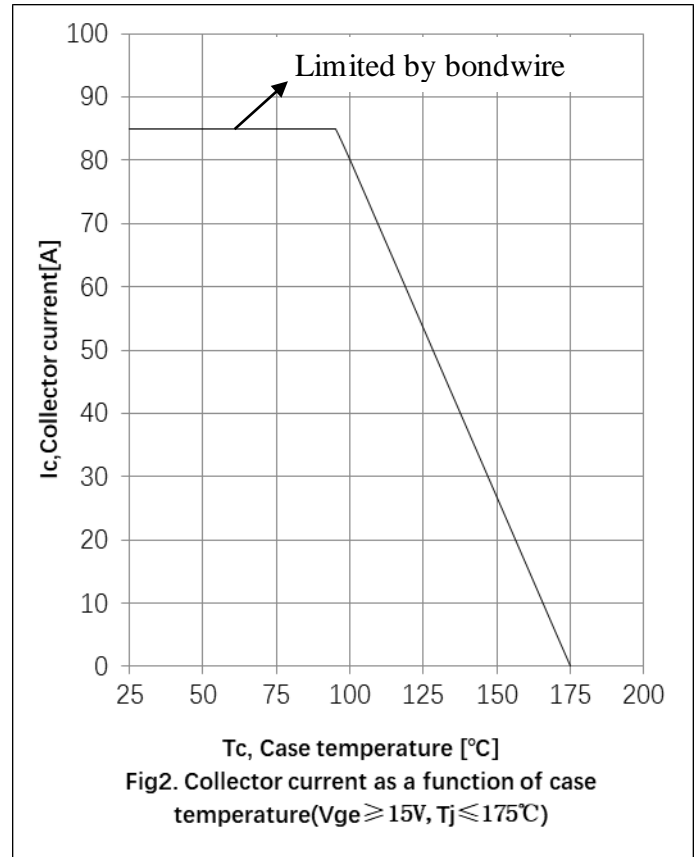
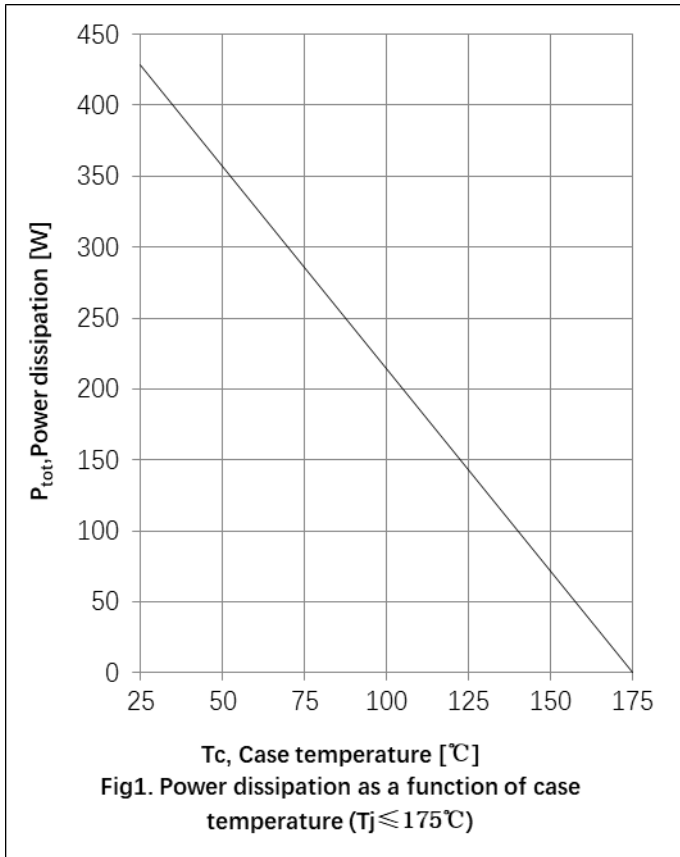


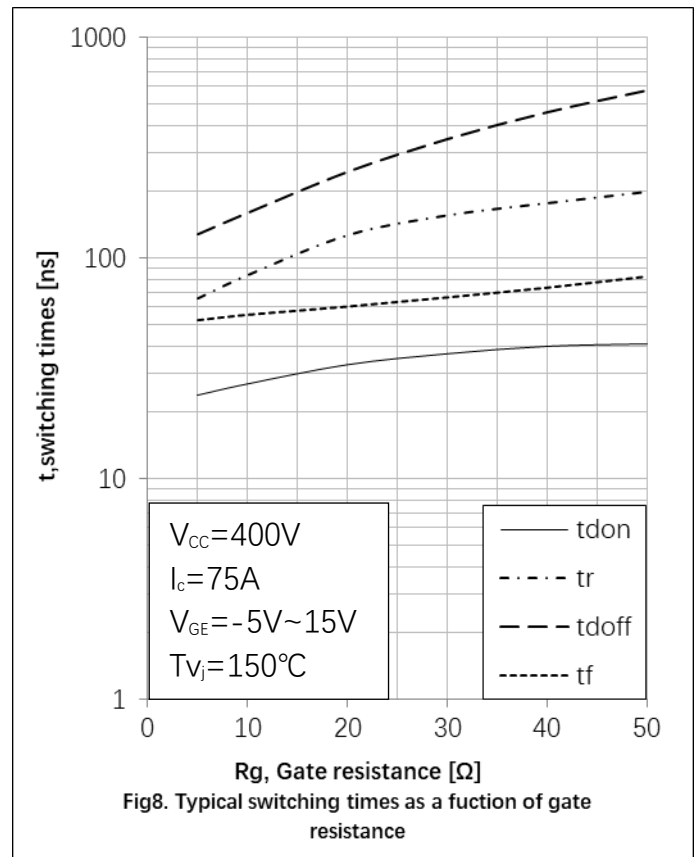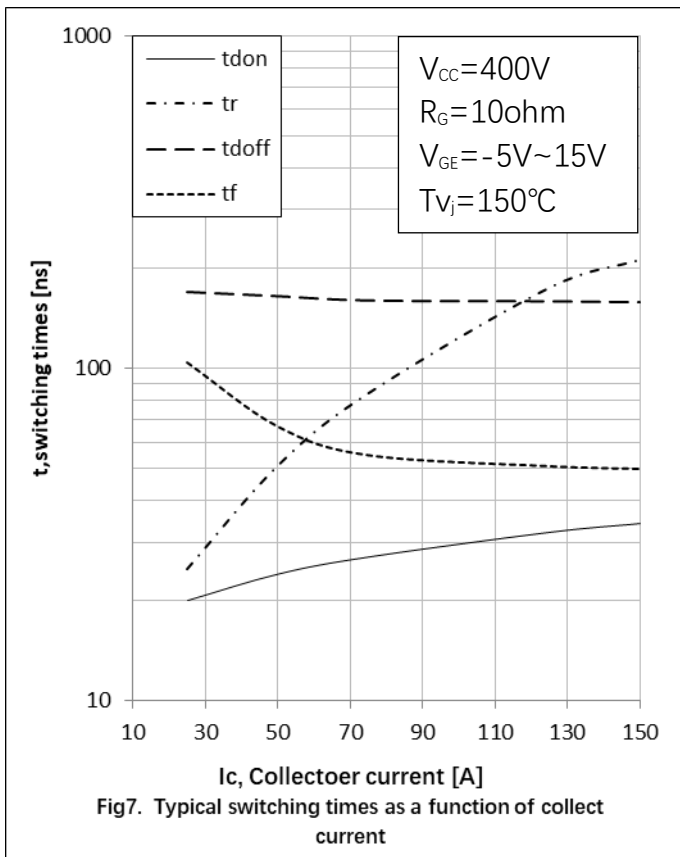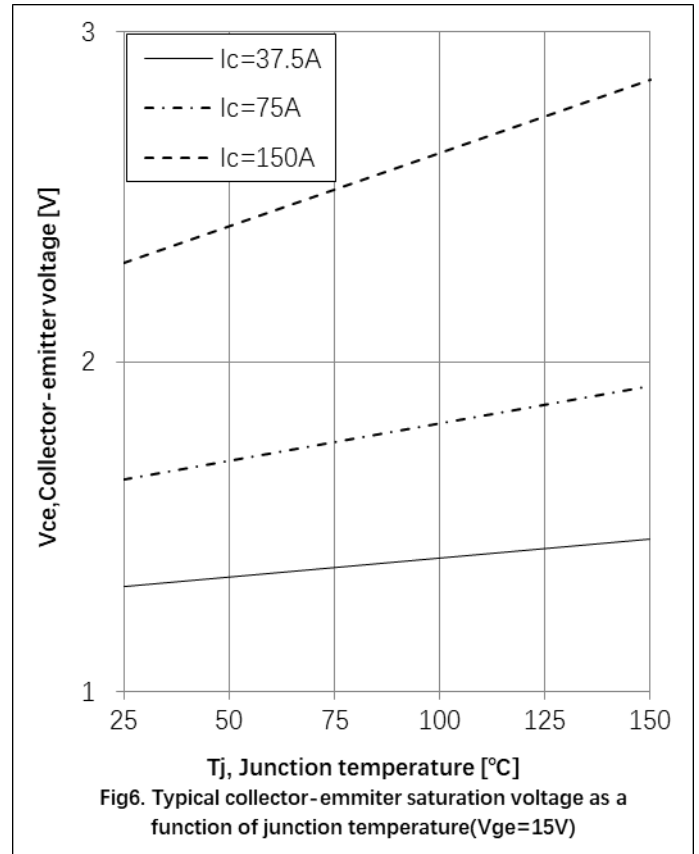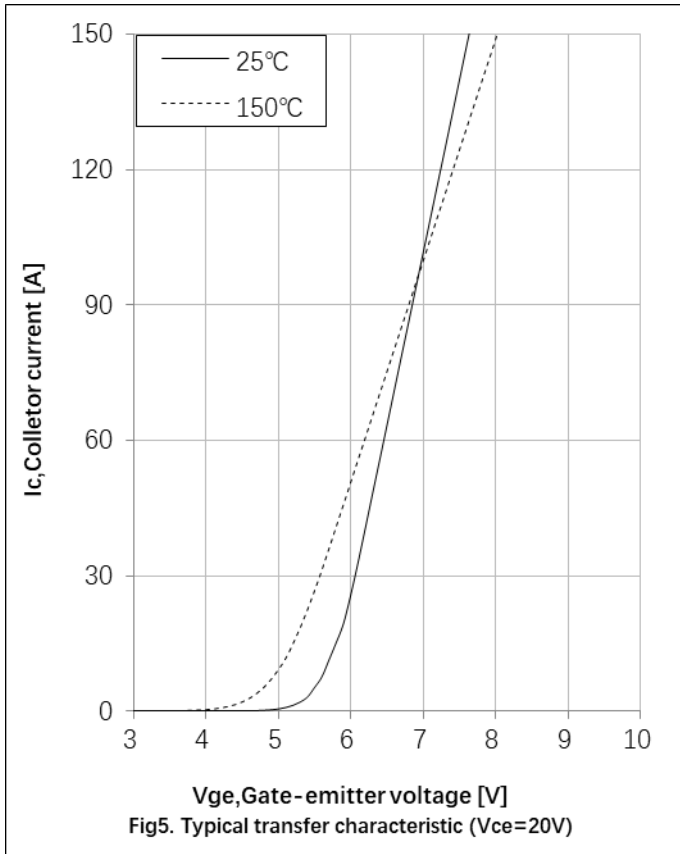

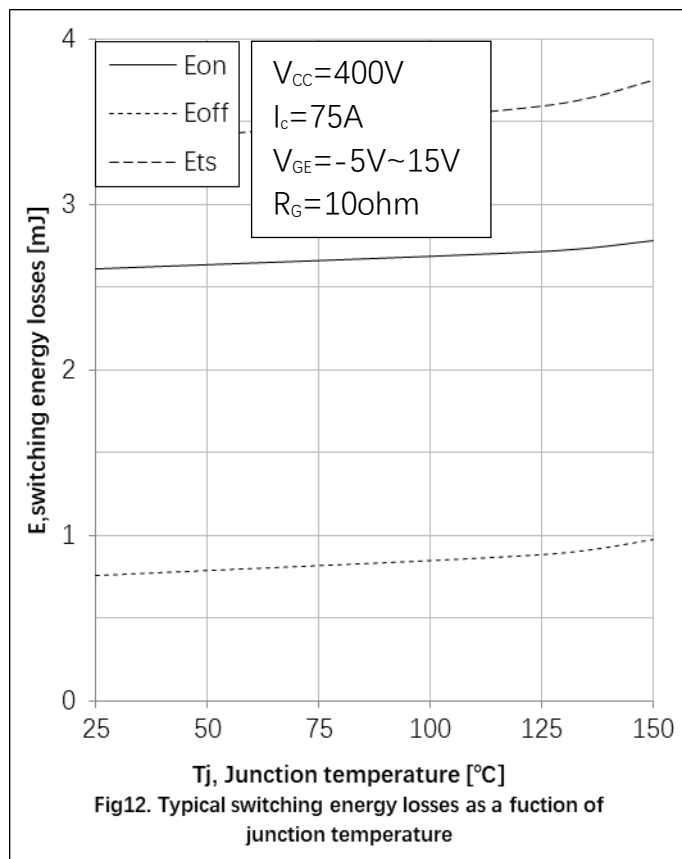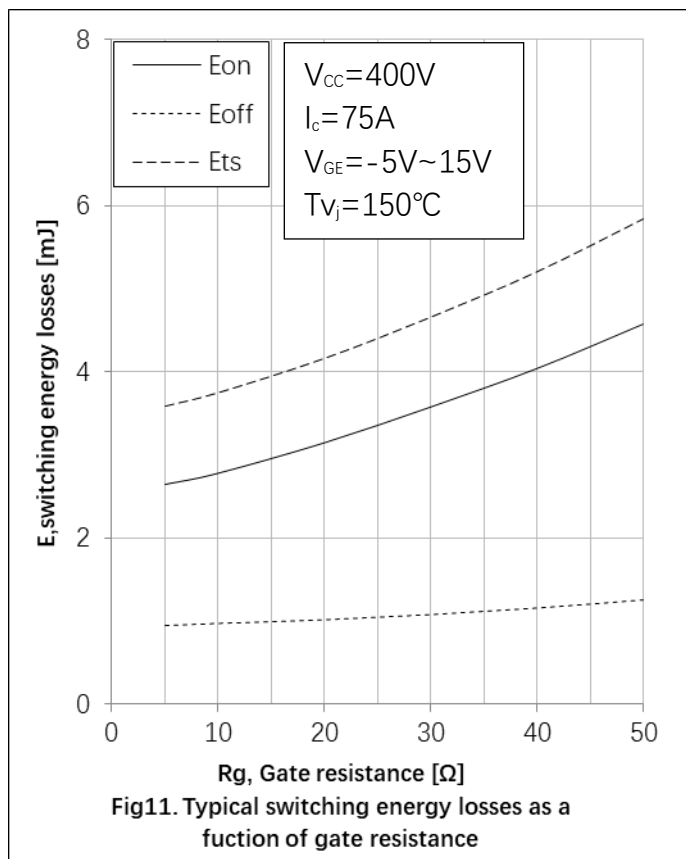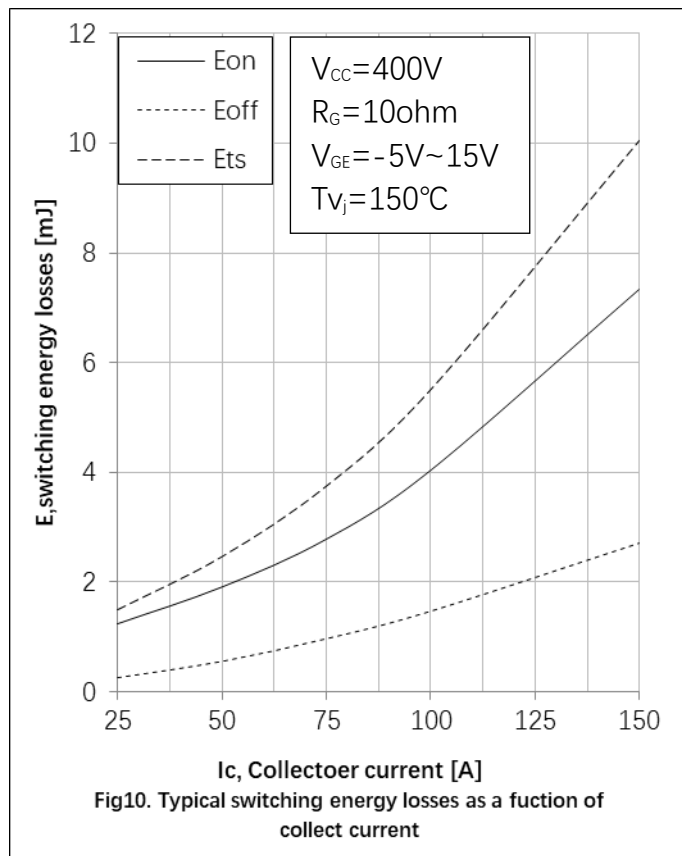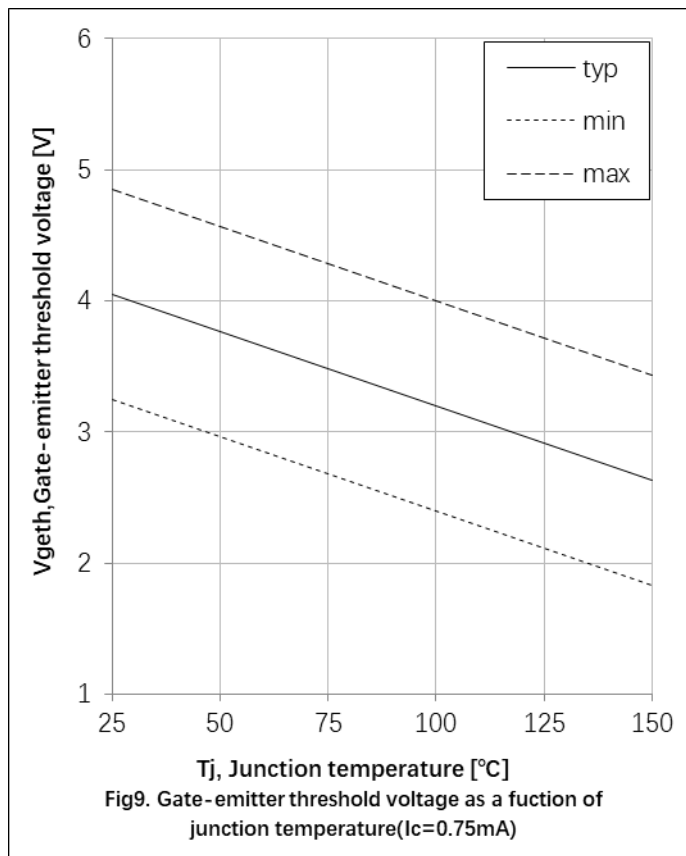


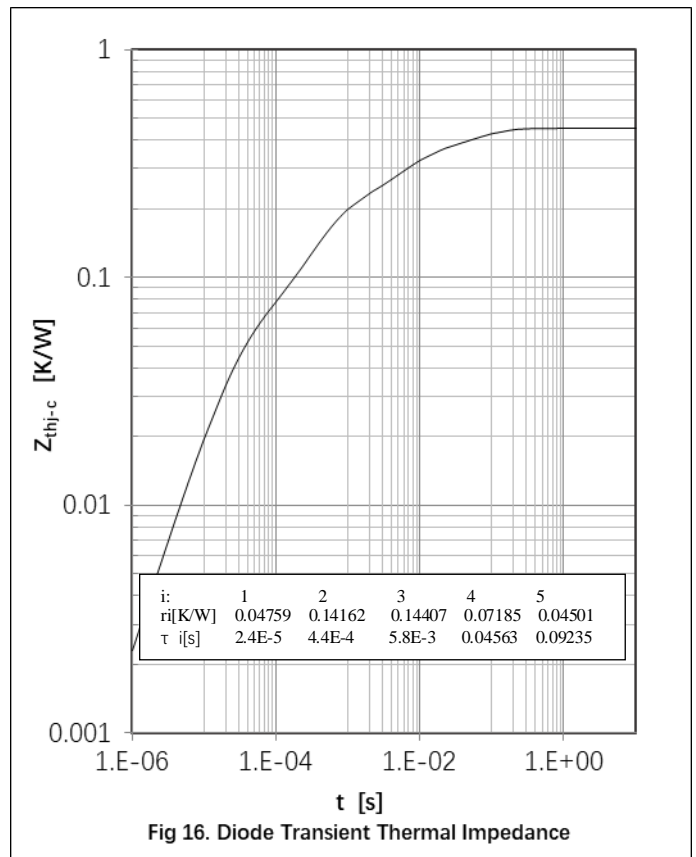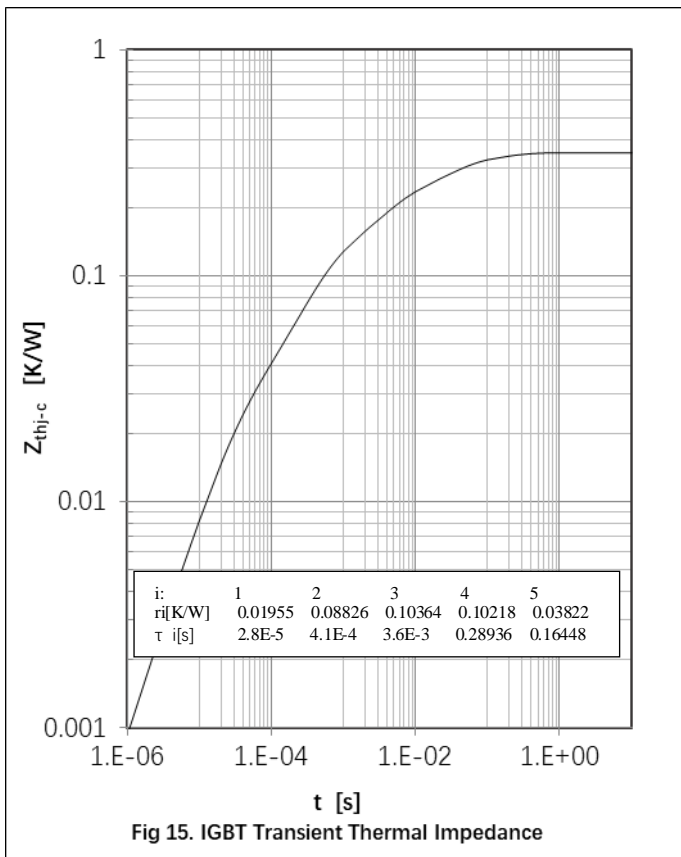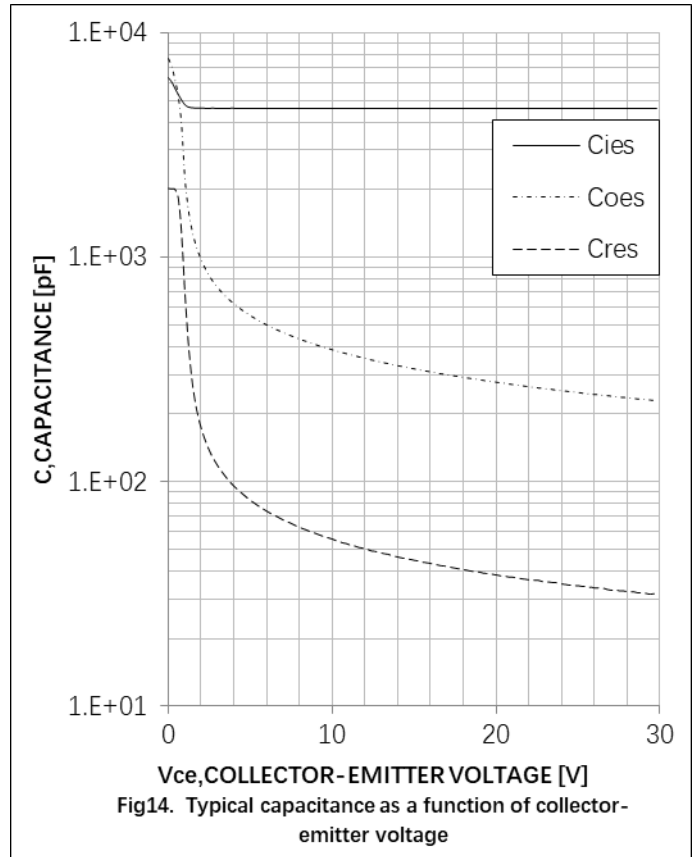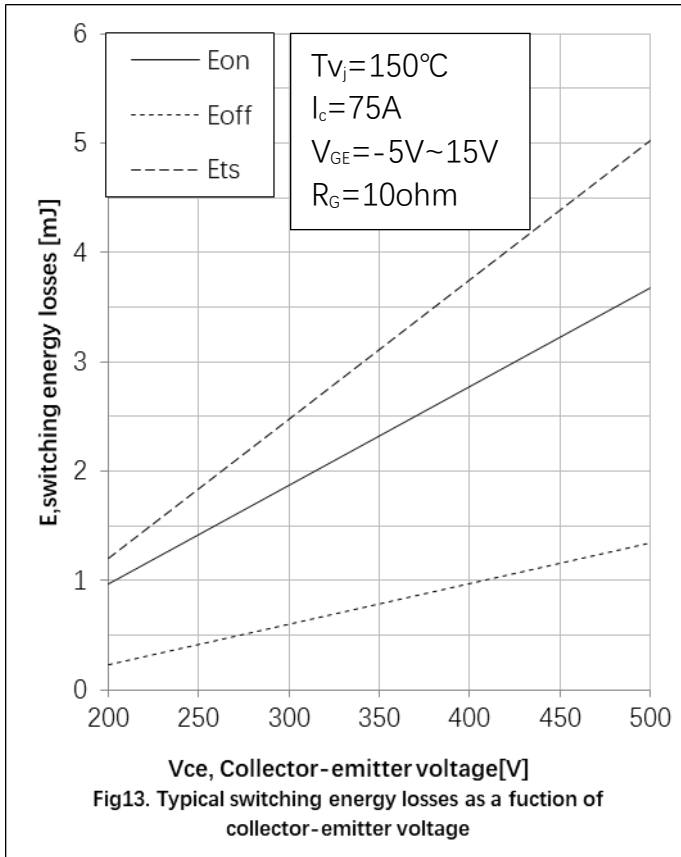



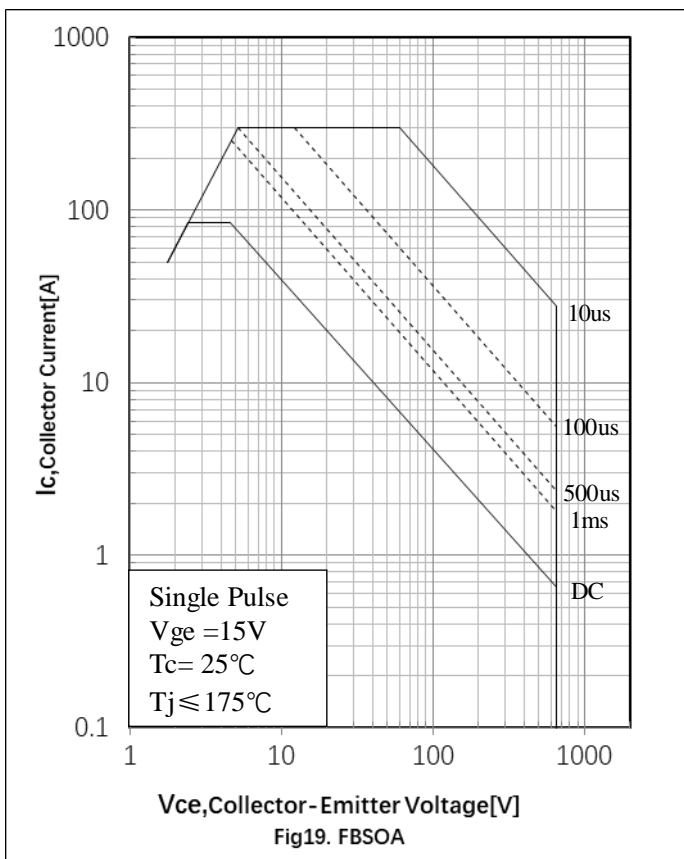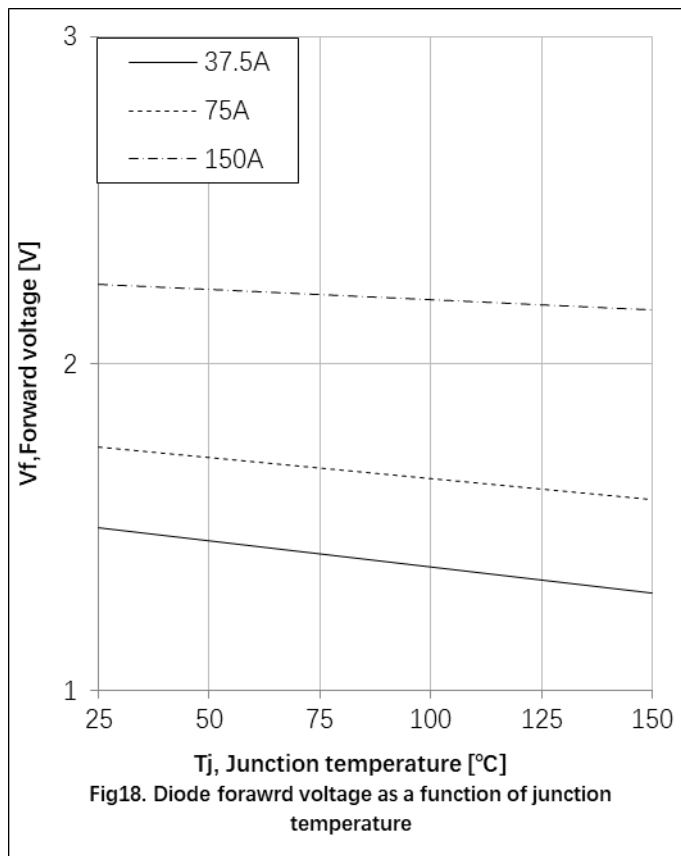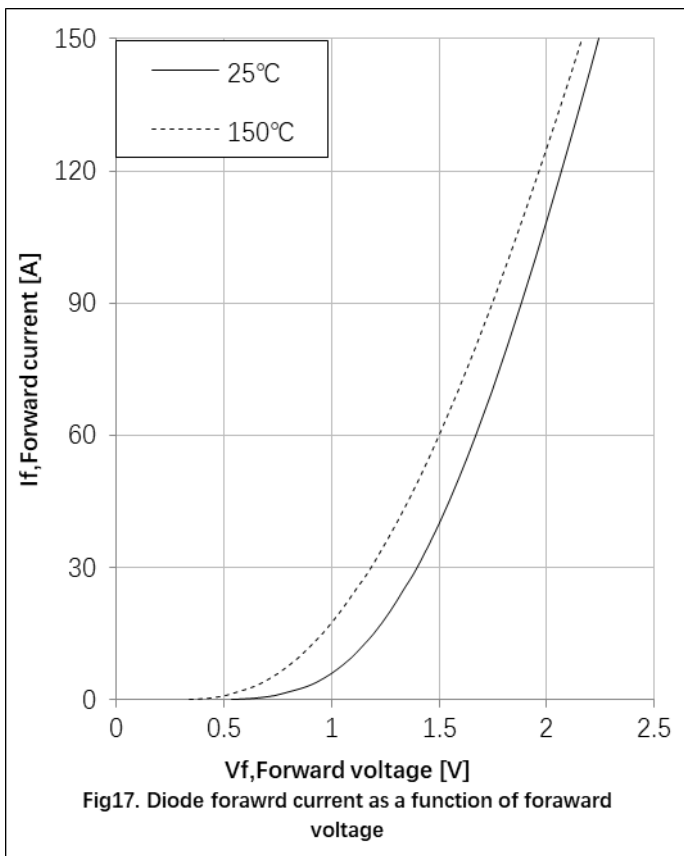


● **Circuit Diagram**



● **Package Outline Information**

**CASE: TO 247-4L**

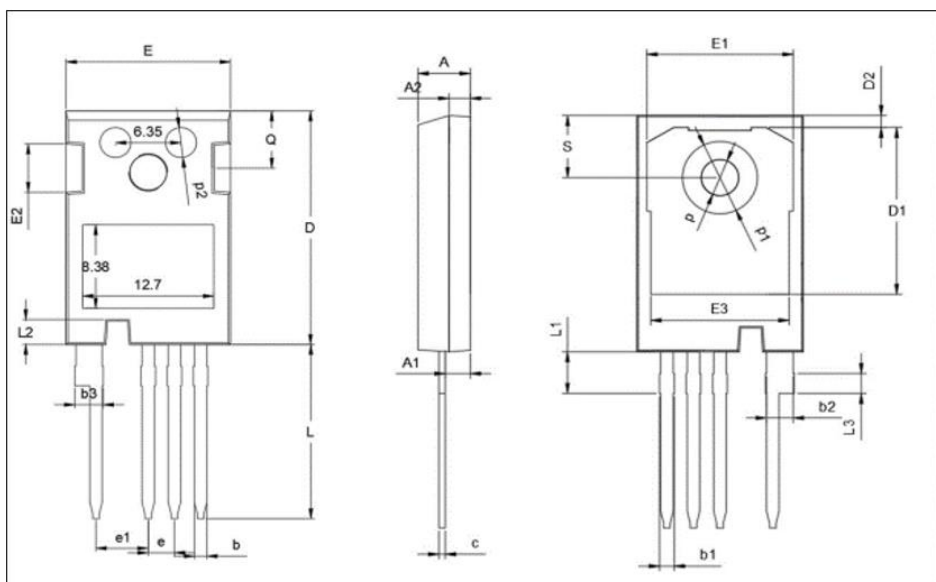

TO247-4L			
Dim	Min	Norm	Max
A	4.80	5.00	5.20
A1	2.30	2.40	2.50
A2	1.88	1.98	2.08
b	1.10	1.20	1.30
b1	1.20	/	1.50
b2	2.35	2.55	2.75
b3	2.45	/	2.85
c	0.55	0.60	0.65
D	23.3	23.45	23.6
D1	16.25	16.55	16.85
D2	1.00	/	1.30
e	TYP2.54		
e1	TYP5.06		
E	15.75	15.90	16.05
E1	13.80	/	14.20
E2	4.40	4.75	5.10
E3	13.00	/	13.45
L	17.34	17.49	17.64
L1	4.00	/	4.30
L2	2.35	/	2.65
L3	TYP1.98		
Q	5.60	5.80	6.00
S	6.05	/	6.30
p	TYP3.58		
p1	TYP7.18		
p2	TYP3.00		